



Item # \_\_\_\_\_

# **RSAC** Snap Action Griddles



## **STANDARD FEATURES:**

- ◆ Compact heavy gauge chassis for long life.
- ◆ Stainless steel sides and front valve cover.
- ◆ Double side panels for better insulation.
- ◆ Heavy duty burner every 12", rated at 30,000 BTU/hr.
- ◆ Solid State control with sensor embedded in the plate.
- ◆ Safety pilot with electronic ignition.
- ◆ Aeration panels between the burners for added efficiency
- ◆ 4" wide grease trough models with large drain opening for easy cleaning.
- ◆ 1-1/2 gallon capacity grease can.
- ◆ 1" thick griddle plate with polished cooking surface.
- ◆ 4" Long adjustable heavy duty legs included.

**RSAC-36**  
**Shown**

## **OPTIONS:**




- ◆ Stainless steel stand with adjustable legs.
- ◆ Casters for stand.
- ◆ Open burner hotplate with either two or four burners (see specification information on the back).

Royal solid state control griddles are designed for optimum performance, durability, easy cleanup and maintenance. The heavy duty griddles feature 30,000 BTU/hr. "U" burners with one control for each burner. The griddle plates are highly polished with a spatula width grease trough. A heavy all stainless steel plate ledge aids in food preparation and serving and is easy to clean.

**ROYAL RANGE OF CALIFORNIA, INC.**  
3245 CORRIDOR DRIVE, EASTVALE, CA 91752  
(800) 769-2414 in the U.S. (951) 360-1600 Fax: (951) 360-7500  
[www.royalranges.com](http://www.royalranges.com) E-mail: [royalrange@dslxtreme.com](mailto:royalrange@dslxtreme.com)  
PRINTED IN THE U.S.A. (08/11)



## Snap Action Griddle Specifications

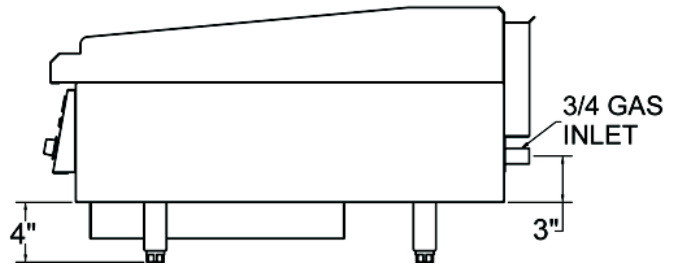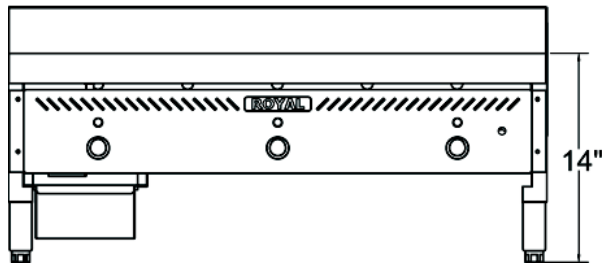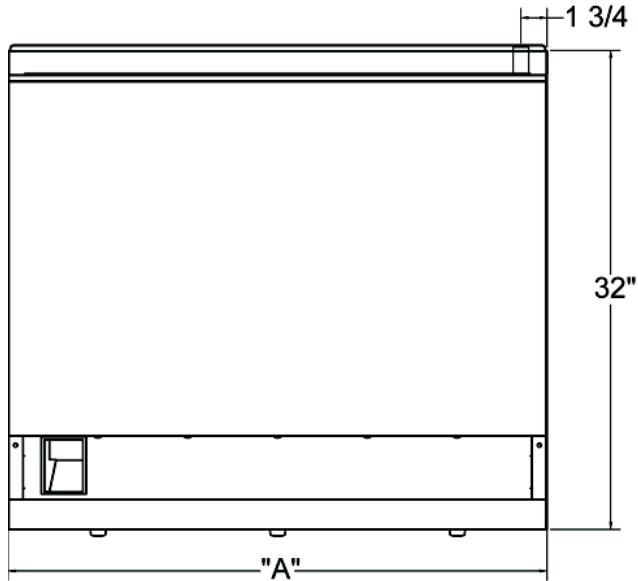

MODEL NO.	WIDTH (A)	DEPTH	NUMBER OF T'STATS	NUMBER OF BURNERS *	TOTAL BTU	SHIP WEIGHT
RSAC-24	24"	32"	2	2	60,000	215 Lbs.
RSAC-36	36"	32"	3	3	90,000	300 Lbs.
RSAC-48	48"	32"	4	4	120,000	350 Lbs.
RSAC-60	60"	32"	5	5	150,000	640 Lbs.
RSAC-72	72"	32"	6	6	180,000	745 Lbs.

**Electrical: 120V 60Hz 1 phase, 1amp.  
6' power cord with grounded plug**

**Gas Connection:** 3/4" NPT on the right hand rear of the appliance  
The pressure regulator (supplied) is to be connected here by the installer.

**Gas pressure:** 5" W.C. - Natural Gas  
10" W.C. - Propane

**Combustible Clearances:**

15 inches sides  
6 inches rear

**Non-combustible Clearances:**

0 inches sides  
0 inches rear

*Due to continuing product development to ensure best possible performance, these specifications are subject to change without prior notification*